

TC77ex-NI Accessories

Datasheet











Accessories for use in potentially explosive atmospheres

Accessories are approved for:

- ATEX: Zone 2/22 (EPS 17 ATEX 1 028 X)
- IECEx: Zone 2/22 (IECEx EPS 17.0012X)
- NEC: Class I,II, III Div 2 (ETL File 5012876)



battery	
Description	- certified in combination with TC77ex_NI
	 Lithium-ion battery 3.7 V/4620 mAh
	May only be changed and charged outside the potentially explosive atmosphere!

B7-A2Z0-0072







Scan handle

Order no.

- Countrianate	
Description	 certified in combination with TC7x series
	- Simple assembly and disassembly without tools
	- Camera and expansion interface remain usable
	- Hand strap can remain on the device
	 Holder for stylus
	 Charging in base station with mounted scan handle possible
	Must be changed only outside potentially explosive atmosphere!
Order no.	B7-A2Z0-0052

Leather holster


Description	certified in combination with TC7x seriesHolder for stylus	
Order no.	B7-A2Z0-0057	

Accessories for use in potentially explosive atmospheres



Leather carry case

Description	- certified in combination with TC7x series	
	 Robust leather in industrial quality 	
	- Holder for stylus	
	 Included belt clip 	
	Must be changed only outside potentially explosive atmosphere!	
Order no.	B7-A2Z0-0073	

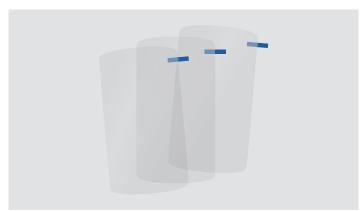

Screen protector

Description	- certified in combination with TC7x series	
	- 3 pieces	
	Must be changed only outside potentially explosive atmosphere!	
Order no.	B7-A2Z0-0051	

Accessories for use outside potentially explosive atmospheres



4-slot battery charging station

TC 75Xex-NI	- Charging four batteries	
	- Charging display via LED	
Also required	(not included in the delivery)	
	 Power supply with DC connecting cable 	
	- AC power cable	
TC 75Xex-NI	G7-A0Z0-0020	



Base station

Description	- Charging the Touch Computer	
	 Charging a spare battery 	
Also required	(not included in the delivery)	
	 Power supply with DC connecting cable 	
	- AC power cable	
	 Micro USB cable for data synchronization 	
Order no.	G7-A0Z0-0022	



USB adapter cable

Description	Charging the Touch ComputerData synchronization via USB	
Also required	(not included in the delivery)	
	 Power supply for USB adapter cable 	
	- AC power cable	
Order no.	G7-A0Z0-0037	



Power supply

Description	- with DC connecting cable	
	 for 4-slot battery charging station and base station 	
	Input voltage: AC 100 V to 240 V	
	Output voltage: DC 12 V/4,16 A/50 W	
Order no.	G7-A0Z0-0023	



Power supply

Description	– for USB adapter cable	
	 Including DC connecting cable 	
	 Input voltage: AC 100 V to 240 V 	
	 Output voltage: DC 5 V/3 A/16 W 	
Order no.	G7-A0Z0-0038	



Micro USB cable

Description	for base stationfor data synchronizationUSB (A) to micro USB (B)
Order no.	03-9919-0013



AC power cable

Description	suitable for power supply with DC connection cable3-wire	
	country-specific	
Order no.	US + Canada	G7-A0Z0-0024
	EU + APAC	G7-A0Z0-0026
	Taiwan	G7-A0Z0-0027
	Please purchase the required country-specific cables in the respective country!	



AC power cable

Ao power can	nc .	
Description	- suitable for power supply for USB adapter cable	
	- 3-wire	
	 country-specific 	
Order no.	US + Canada	G7-A0Z0-0032
	EU + APAC	G7-A0Z0-0034
	Please purchase the required country-specific cables in the respective country!	
	_	